



中国认可  
国际互认  
检测  
TESTING  
CNAS L1499



National Quality Supervision and Testing Center for  
Personal Protective Equipment (Beijing)  
(Testing Laboratory for Labour Protection Products of  
Beijing Municipal Institute for Labour Protection)

No.55 Taoranting Street, Xicheng District, Beijing, China.  
Phone: +86 10 63519250 +86 10 63520770 +86 10 83530311  
Fax: +86 10 63519250 +86 10 63520770  
Email: lbzjbj@bmilp.com  
Website: http://lbzjbj.bmilp.com/

The Testing Center is accredited for compliance with ISO/IEC 17025.

The results of tests, calibrations and/or measurements included in this document are traceable to Chinese/national standards.  
CNAS is a signatory to the ILAC mutual recognition arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

## TEST REPORT

### Particulate respirator-half facepiece

EN 149: 2001 +A1: 2009 Respiratory protective devices — Filtering half masks to protect against particles — Requirements, testing, marking

Product: Particle filtering half mask

Report No: 2021 (D) - 0018

Client: Jinhua GIME Safety Protective Product Co., Ltd.

Model (s): 9130

Date(s) of tests: 2021.01.27-2021.02.26

## DESCRIPTION OF SAMPLES

### General Information

Classification  
FFP3 NR

Main Components  
White folding mask

### Manufacturer

Jinhua GIME Safety Protective Product Co., Ltd.

### Manufacturer Address

No. 178, Yi Village, Bailongqiao Town, Jinhua City, Zhejiang Province, P. R. China

Signed:

Issued: 2021.02.26

陈倬为 Chen Zhuowei  
Authorized Signatory, Lab Director

Page 1 of 10

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

国家劳动保护用品质量监督检验中心(北京)

**Conditions:**

The test results presented in this report relate to the samples tested only.

This report may be reproduced and distributed to your clients, provided that it is reproduced and distributed in full.

The authenticity of this test report and its contents can be verified by contacting the laboratory.



FFP2	$\leq 6\%$	$\leq 6\%$
FFP3	$\leq 1\%$	$\leq 1\%$

Note8: FFP3 respirator. Test results are shown in Annex A Table 7.9.2.

#### 7.10 Compatibility with skin

Pass<sup>9</sup>

Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.

Note9: No irritation or any other adverse effect to health.

#### 7.11 Flammability

Pass<sup>10</sup>

When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.

Note10: Test results are shown in Annex A Table 7.11.

#### 7.12 Carbon dioxide content of the inhalation air

Pass<sup>11</sup>

The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)

Note11: Test results are shown in Annex A Table 7.12.

#### 7.13 Head harness

Pass<sup>12</sup>

The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.

The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.

Note12: Head harness can be donned and removed easily, adjustable or self-adjusting and have sufficiently robust to hold the particle filtering half mask firmly.

#### 7.14 Field of vision

Pass<sup>13</sup>

The field of vision is acceptable if determined so in practical performance tests.

Note13: Pass the practical performance tests.

#### 7.15 Exhalation valve

N/A<sup>14</sup>

A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.

If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.

Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.

When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.

Note14: No exhalation valve.

#### 7.16 Breathing resistance

Pass<sup>15</sup>

Classification	Maximum permitted resistance (mbar)		
	Inhalation		Exhalation
	30 l/min	95 l/min	160 l/min
FFP1	0.6	2.1	3.0
FFP2	0.7	2.4	3.0
FFP3	1.0	3.0	3.0

Note15: FFP3 respirator. Test results are shown in Annex A Table 7.16.

**7.17 Clogging**N/A<sup>16</sup>**7.17.2 Breathing resistance**

Valved particle filtering half masks:

After clogging the inhalation resistances shall not exceed:

FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow

The exhalation resistance shall not exceed 3 mbar at 160 L/min continuous flow

Valveless particle filtering half masks

After clogging the inhalation and exhalation resistances shall not exceed:

FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow

**7.17.3 Penetration of filter material**

Sodium chloride test 95 l/min

Paraffin oil test 95 l/min

FFP1	≤20%	≤20%
FFP2	≤6%	≤6%
FFP3	≤1%	≤1%

**Note16:** Single shift use only.N/A<sup>17</sup>**7.18 Demountable parts**

All demountable parts (if fitted) shall be readily connected and secured, where possible by hand

**Note17:** No demountable parts.**9 Marking****Not tested****9.1 Packaging**

The following information shall be clearly and durably marked on the smallest commercially available packaging or legible through it if the packaging is transparent.

**9.1.1** The name, trademark or other means of identification of the manufacturer or supplier.**9.1.2** Type-identifying marking.**9.1.3** Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable.

Example: FFP2 R D.

**9.1.4** The number and year of publication of this European Standard.**9.1.5** At least the year of end of shelf life. The end of shelf life may be informed by a pictogram as shown in Figure 12a, where yyyy/mm indicates the year and month.**9.1.6** The sentence 'see information supplied by the manufacturer', at least in the official language(s) of the country of destination, or by using the pictogram as shown in Figure 12b.**9.1.7** The manufacturer's recommended conditions of storage (at least the temperature and humidity) or equivalent pictogram, as shown in Figures 12c and 12d.**9.1.8** The packaging of those particle filtering half masks passing the dolomite clogging test shall be additionally marked with the letter "D". This letter shall follow the classification marking preceded by a single space.**9.2 Particle filtering half mask**

Particle filtering half masks complying with this European Standard shall be clearly and durably marked with the following:

**9.2.1** The name, trademark or other means of identification of the manufacturer or supplier.**9.2.2** Type-identifying marking.

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

**9.2.3** The number and year of publication of this European Standard.

**9.2.4** Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D.

**9.2.5** If appropriate the letter D (dolomite) in accordance with clogging performance. This letter shall follow the classification marking preceded by a single space

**9.2.6** Sub-assemblies and components with considerable bearing on safety shall be marked so that they can be identified.

---

### **End of Test Results**

---

**Annex A: Summarization of Test Data****Table 7.9.1-A Inward leakage test data**

Test specification: EN 149: 2001+A1: 2009 Clause 8.5

Subject	Sample No.	Condition	Walk(%)	Head Side/side(%)	Head up/down(%)	Talk(%)	Walk(%)	Mean(%)
Yi	1	A.R.	0.82	1.01	1.27	1.08	0.92	1.0
Gong	2	A.R.	1.15	1.36	1.49	1.30	1.14	1.3
Yu	3	A.R.	1.46	1.60	1.75	1.58	1.39	1.6
Hu	4	A.R.	1.28	1.41	1.60	1.43	1.28	1.4
Deng	5	A.R.	1.58	1.73	1.87	1.61	1.51	1.7
Zhang	6	T.C.	1.16	1.38	1.57	1.40	1.27	1.4
Liu	7	T.C.	1.37	1.52	1.72	1.50	1.36	1.5
Zhi	8	T.C.	1.96	2.14	2.38	2.20	2.05	2.1
Chen	9	T.C.	1.38	1.52	1.71	1.58	1.36	1.5
Lv	10	T.C.	1.49	1.62	1.84	1.69	1.52	1.6
All 50 individual exercise results were not greater than 5 % 9 out of the 10 individual wearer arithmetic means were not greater than 2 %							Pass	

**Table 7.9.1-B Facial dimension**

Subject	Face length	Face Width	Face Depth	Mouth Width
Yi	120	130	109	59
Gong	122	140	115	65
Yu	119	160	139	55
Hu	112	122	119	63
Xu	110	130	118	60
Deng	115	119	110	59
Zhang	112	123	113	55
Liu	103	130	100	50
Zhi	118	139	130	63
Fang	115	129	120	50
Chen	116	150	132	56
Lv	110	121	110	53

**Table -7.9.2 Penetration of filter material**

Test specification: EN 149: 2001+A1: 2009 Clause 8.11

Aerosol	Condition	Sample No.	Penetration (%)	Assessment
Sodium chloride test	As received	11	0.279	Pass
		12	0.242	
		13	0.205	
	Simulated wearing treatment	14	0.278	
		15	0.314	
		16	0.291	
	Mechanical strength+ Temperature conditioned	17	0.343	
		18	0.378	
		19	0.351	
Paraffin oil test	As received	20	0.646	
		21	0.738	
		22	0.713	
	Simulated wearing treatment	23	0.851	
		24	0.907	
		25	0.823	
	Mechanical strength+ Temperature conditioned	26	0.948	
		27	0.861	
		28	0.915	
Flow conditioning: Single filter: 95.0 L/min				

**Table 7.11 Flammability**

Test specification: EN 149: 2001+A1: 2009 Clause 8.6

Condition	Sample No.	Result	Assessment
As received	29	Burn for 1 s	Pass
	30	Burn for 1 s	
Temperature conditioned	31	Burn for 1 s	
	32	Burn for 2 s	

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

**Table 7.12 Carbon dioxide content of the inhalation air**  
 Test specification: EN 149: 2001+A1: 2009 Clause 8.7

Condition	Sample No.	Result					Assessment			
As received	33	0.43%					Mean value 0.4%	Pass		
	34	0.40%								
	35	0.41%								

**Table 7.16 Breathing resistance (mbar)**  
 Test specification: EN 149: 2001+A1: 2009 Clause 8.9



As received	Flow rate		36					37					38				
			A	B	C	D	E	A	B	C	D	E	A	B	C	D	E
Inhalation	30 l/min	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.6
	95 l/min	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.8	1.7	1.8	1.8	1.7	1.8	1.8	1.8	1.8
	Exhalation	160 l/min	2.7	2.8	2.8	2.7	2.8	2.8	2.8	2.8	2.8	2.8	2.7	2.8	2.8	2.8	2.8
Simulated wearing treatment	Flow rate		39					40					41				
			A	B	C	D	E	A	B	C	D	E	A	B	C	D	E
	Inhalation	30 l/min	0.6	0.5	0.6	0.6	0.6	0.5	0.5	0.6	0.5	0.6	0.6	0.6	0.6	0.6	0.6
Exhalation	95 l/min	1.8	1.8	1.8	1.8	1.7	1.8	1.7	1.8	1.8	1.8	1.8	1.8	1.7	1.8	1.8	1.8
	160 l/min	2.8	2.7	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.7	2.8	2.8	2.8	2.8	2.8	2.7
	Flow rate		42					43					44				
Temperature conditioned			A	B	C	D	E	A	B	C	D	E	A	B	C	D	E
Inhalation	30 l/min	0.6	0.6	0.6	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
95 l/min	1.7	1.7	1.8	1.7	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
Assessment	160 l/min	2.8	2.7	2.8	2.8	2.7	2.8	2.8	2.8	2.8	2.8	2.8	2.7	2.8	2.8	2.8	2.8

A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side

Test	Uncertainty
Total inward leakage	4.1%
Penetration of filter material	1.1%
Flammability	5.0%
Carbon dioxide content of the inhalation air	2.6%
Breathing resistance	1.8%

**End of Annex A**

## ANNEX B PHOTOS OF SAMPLES

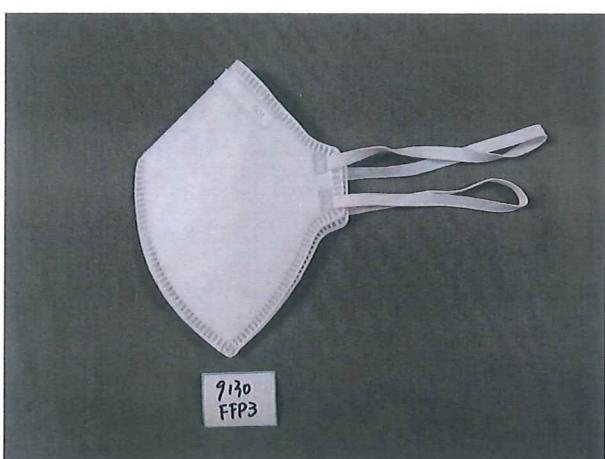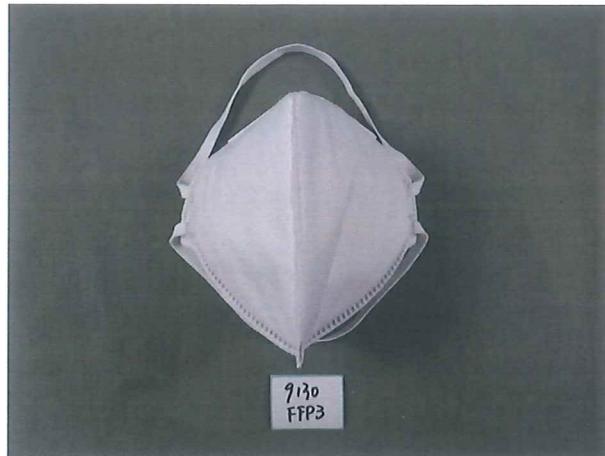

**End of Annex B**

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

国家劳动保护用品质量监督检验中心(北京)