#### The SureTemp<sup>®</sup> Plus 692—

## setting the standard of

#### care even higher



### SureTemp<sup>®</sup> Plus 692 specifications

Calibration Accuracy	±0.2 °F (±0.1 °C) (Monitor Mode)
Temperature Predict Time:	
Oral	Approx. 4-6 secs
Adult Axillary (18 years and older)	Approx. 15 secs
Pediatric Axillary (17 years and you	nger)Approx. 10 secs
Rectal	Approx. 10 secs
Unit Dimensions	
	(215 mm x 81 mm x 62 mm)
Weight	12.6 ounces (357 grams)
Ambient Temperature Range	50.0 °F (10 °C) - 104 °F (40.0 °C)
Patient Temperature Range	80.0 °F (26.7 °C) - 110 °F (43.3 °C)
Power Source	(3)1.5Vdc AA batteries
Battery Life	Approx. 5000 temperatures
Warranty	3-year limited instrument, 1-year limited probe, and 90-day limited probe well

#### ordering information

#### thermometers

- 01692-200 SureTemp Plus Electronic Thermometer (Model 692), Wall Mount, Security System with ID Location Field, Oral Probe with Oral Probe Well, 3-Year Limited Warranty
- 01692-201 SureTemp Plus Electronic Thermometer (Model 692), Wall Mount, Security System with ID Location Field, Rectal Probe with Rectal Probe Well, 3-Year Limited Warranty
- 01692-300 SureTemp Plus Electronic Thermometer (Model 692), One Per Room, Wall Mount, 9 ft Oral Probe with Oral Probe Well, 3-Year Limited Warranty (*must be locked to the wall*)
- 01692-301 SureTemp Plus Electronic Thermometer (Model 692), One Per Room, Wall Mount, 9 ft Rectal Probe with Rectal Probe Well, 3-Year Limited Warranty (*must be locked to the wall*)
- 01692-700 SureTemp Plus Electronic Thermometer (Model 692), Wall Mount, 9 ft Oral Probe with Oral Probe Well, 3-Year Limited Warranty, with Rolling Stand and Holder for Spare Probe & Well

#### accessories

21326-0000	Wall Holder
21330-0000	Holder for Spare Probe & Well
06138-000	Calibration Key Assy, 690/692
02892-000	Probe & Well Kit 4 ft Rectal
02892-100	Probe & Well Kit 9 ft Rectal
02893-000	Probe & Well Kit 4 ft Oral
02893-100	Probe & Well Kit 9 ft Oral
02891-0000	Probe Well, Blue
02891-1000	Probe Well, Red
08273-000	Thermometer Stand with Holder
	for Spare Probe & Well
21333-0000	Bracket, M600 Stand Upgrade, with
	Holder for Spare Probe & Well
98025-0000	Extended Warranty M692

replacement probe covers

05031-101 Case of 1,000 Probe Covers

Call Welch Allyn to order the SureTemp® Plus 692 4341 State Street Road, P.O. Box 220 Skaneateles Falls, NY 13153-0220 USA (p) 800.535.6663 • (f) 315.685.3361 www.welchallyn.com

> © 2006 Welch Allyn. SureTemp is a registered trademark of Welch Allyn SM2550 Rev D







# Introducing the SureTemp<sup>®</sup> Plus 692 Electronic Thermometer

Speed and accuracy you require. Safety and security you demand.





- Easy-to-use, intuitive operation
- Removable probe well reduces
  the risk of cross-contamination
- Improved accuracy for even more reliable readings
- Innovative security features that cut down on the chance of theft

The SureTemp<sup>®</sup> Plus 692 with the speed and accuracy you require, and the safety and security you demand

When we set out to improve the Welch Allyn SureTemp, we knew we had our work cut out for us. After all, when you start with the thermometer that helped set the standard for speed and accuracy, the expectations run pretty high.


So how did we do? See for yourself by taking a look at the innovative SureTemp Plus 692—easier, safer and more accurate than the original, and still built to withstand constant use in demanding environments.

Easy: An easy-to-read LCD display with flashing icons that clearly communicate in any language, and an intuitive user interface and ergonomic shape make using the SureTemp Plus 692 a breeze.

**Safe:** Patient safety is improved thanks to an interchangeable probe well that reduces the risk of cross-contamination.

Fast and Accurate: In addition to improved accuracy, the SureTemp 692 is one of the fastest thermometers on the market, providing approximately 4- to 6-second oral, 10-second pediatric axillary, 15-second adult axillary, and 10-second rectal measurements.

Secure: To top it all off, our security features make sure the unit stays where it is supposed to be. A location ID on the display and other innovative features help prevent theft.

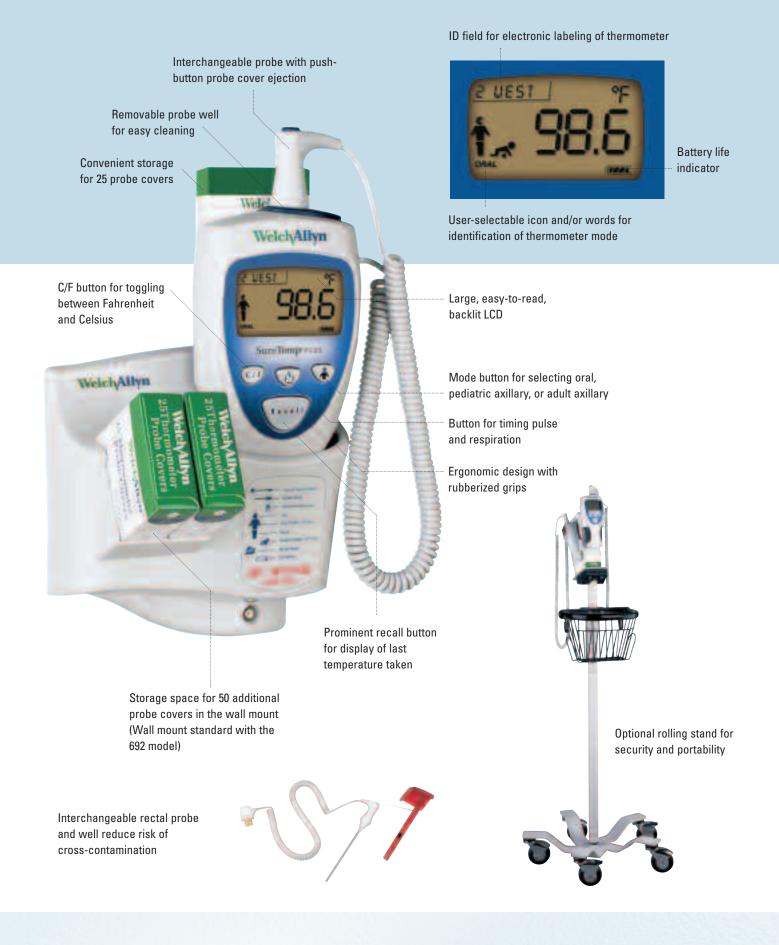

## The SureTemp<sup>®</sup> Plus 692

